



Position the retaining spring (10).

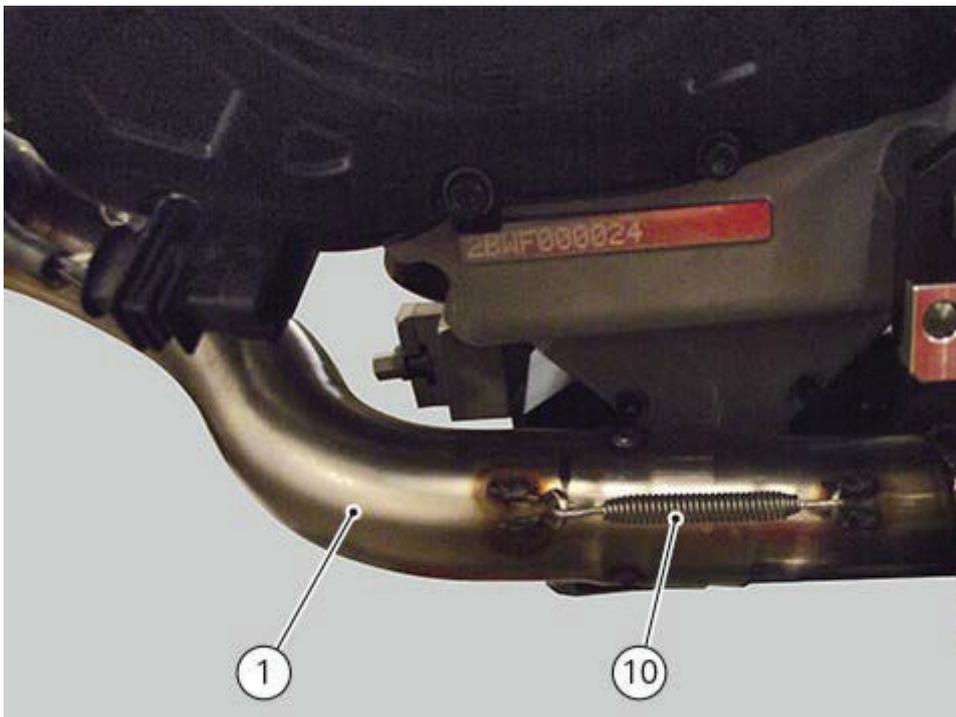

Tighten clip (11) to a torque of $18 \text{ Nm} \pm 10\%$.

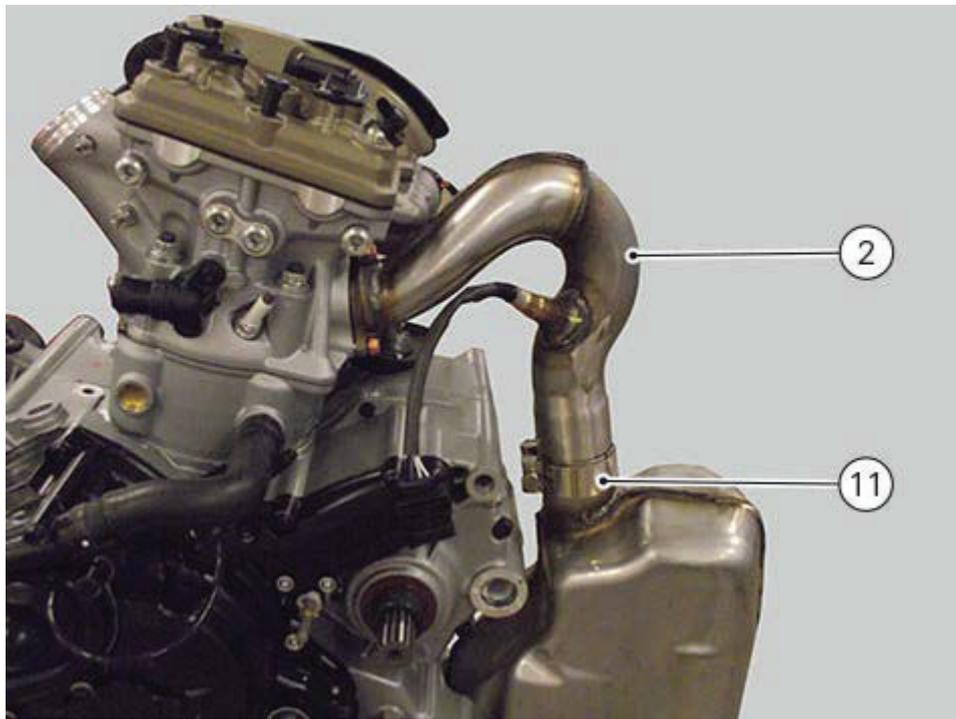

Reconnect the two lambda sensors (9) and (8).

